



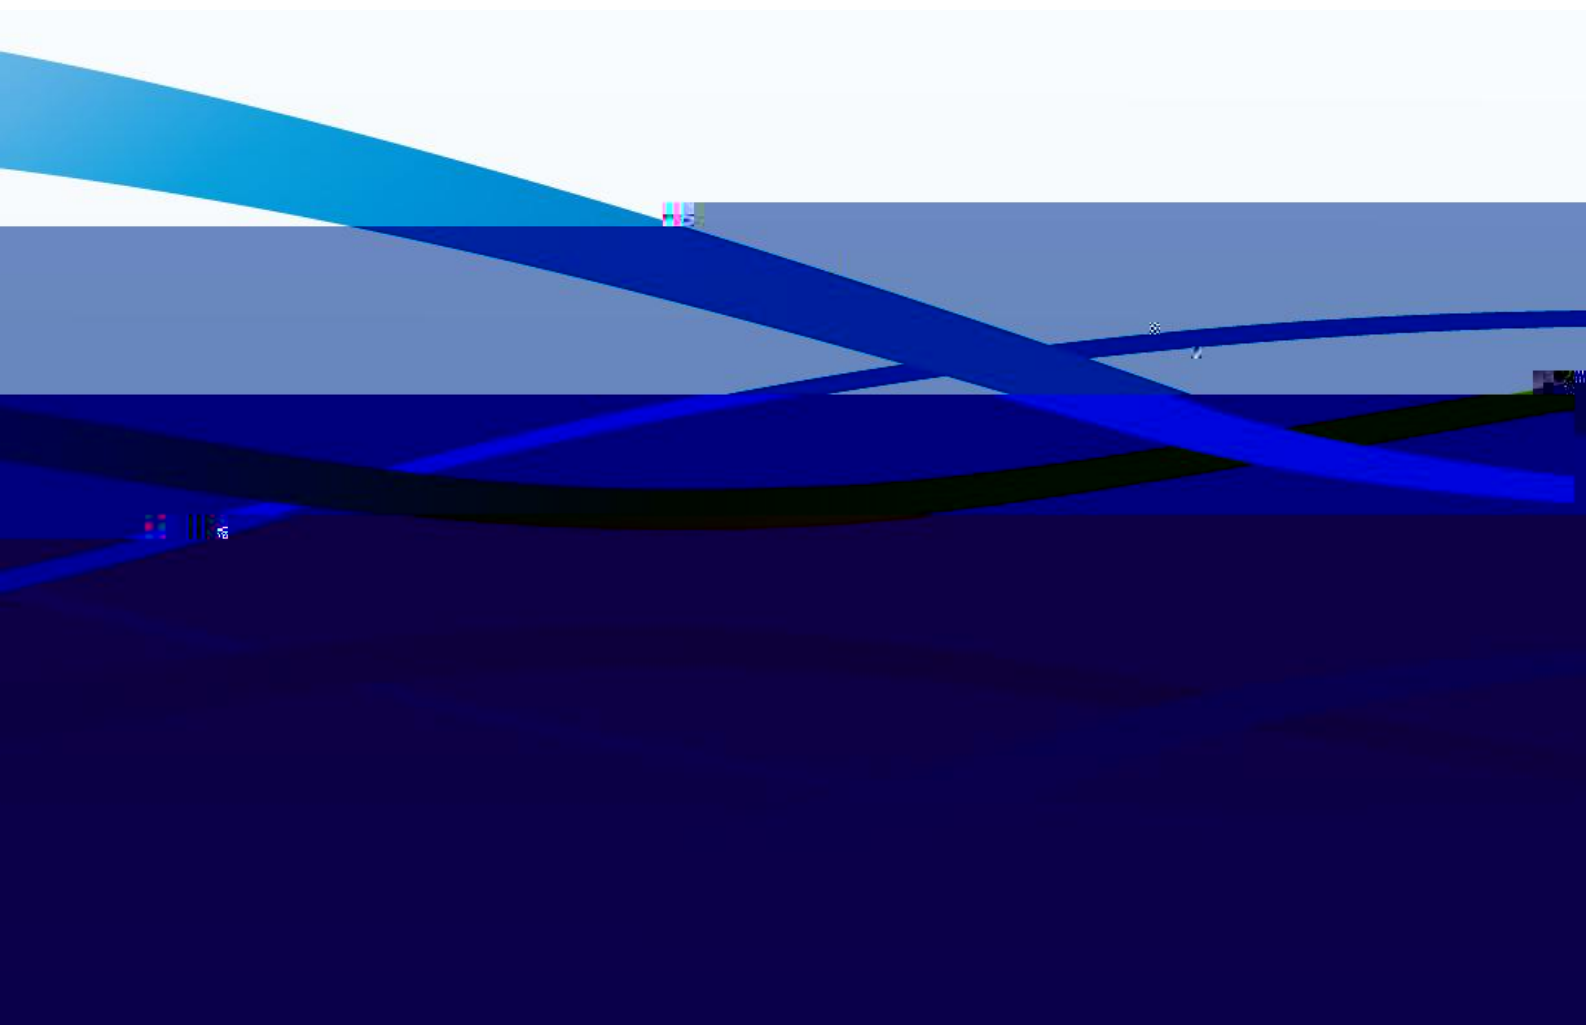

.....	1
4	1
4	2
4	4
4 4	6

4

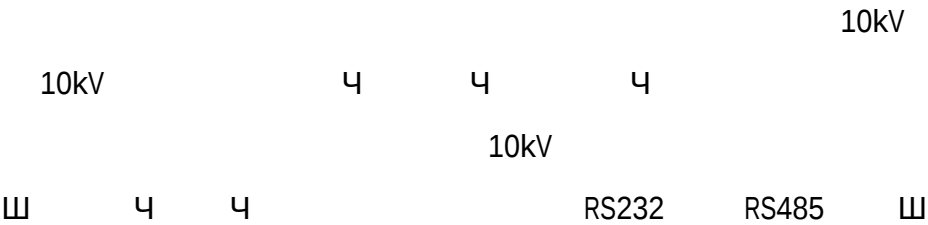

GB/T 17215.322-2008 0.5S

GB/T 17215.323-2008 2

DL/T634.5101-2002

A-1

FTU	FTU
DTU	DTU

4

2.1

FTU
Ш

DC24V ,DTU

DC48V

2.2

3 § 100VШ

2.2

1A 4 5AШ

2.3

1.2 Ш

2.4

50HzШ

2.5

0.5S

2 Ш

2.6

B-1,B-2Ш

B-1 FTU

V

A

2.7.1

4 / 3
4 LED 3
3
80ms ¥ 16ms 3

100k á 3

2.7.2 RS232/RS485

RS232/RS485 3
RS232/RS485 1200bps 4 2400bps 4 4800bps 4
9600bps 19200bps 9600bps 3

2.7.3

1) FTU

24V

DC24V 3

DC18V~DC36V , 5% 3

3

FTU

2W 3

2) DTU

DC48V 3

DC18V~DC72V 5% 3

3

DTU

3W 3

4

3.1

4

4

Ш

4

4

4

4

4

Ш

Ш

3.2

0.01Ш

50

0 4



3 山
3.6

96 山

62 山

7 山

山 24 山

24

山

DL/T 634.5101 | 2002 o 山

4 4

FTU


§

§


4




4


W

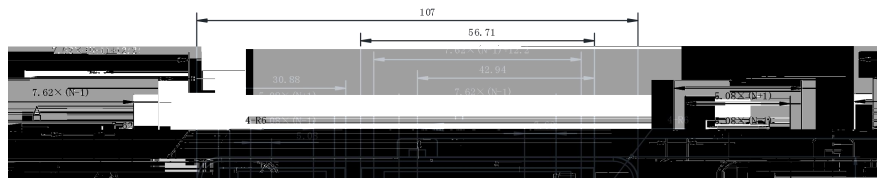


单位 mm

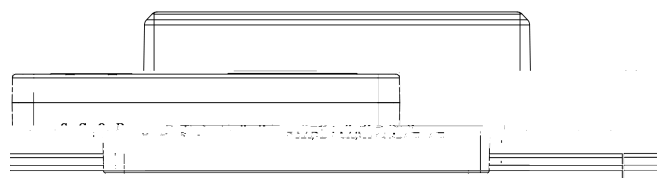

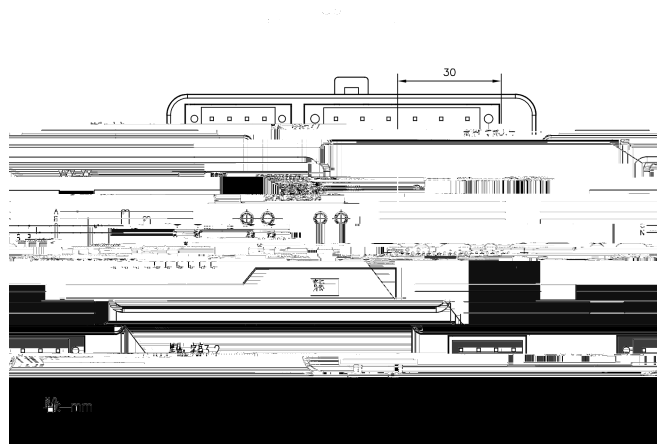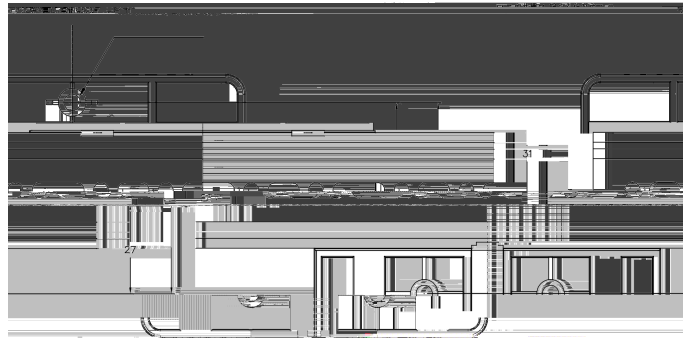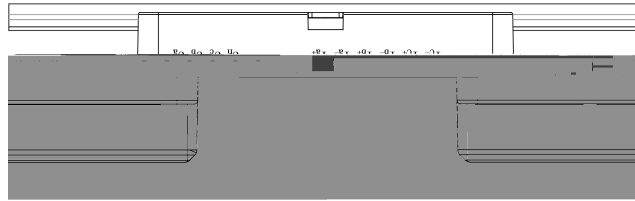

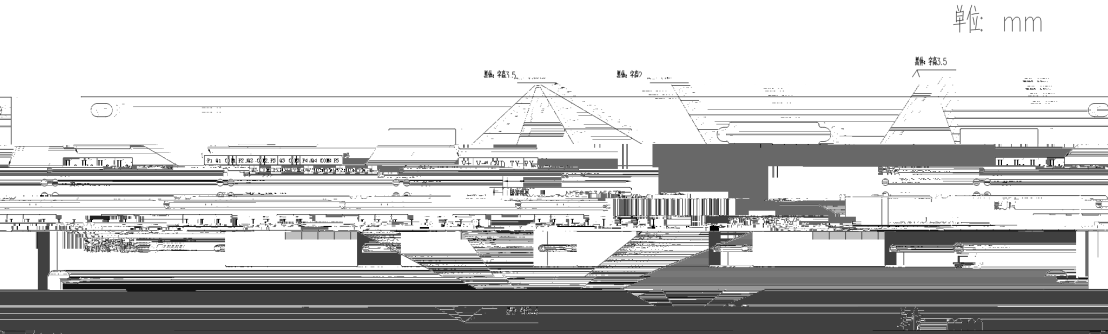

		4	46	48	2	4	DC24V 4RS232/RS485
	DB25						4 46 48
		4			4		
Ⅲ							
	JP12				5.08		4
	5.08				5		DB25
	D-1Ⅲ						
D-1					DTU		

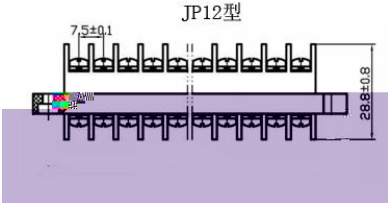1~ 2					
1	la1	1A	RVVP2.5m m		
2	lb1	1B	RVVP2.5m m		
3	lc1	1C	RVVP2.5m m		
4	ln1	1	RVVP2.5m m		

5	Ia2	2A	RVVP2.5m m
6	Ib		

24	COM8	8	RVVP0.2m m		
25	S		RVVP0.2m m		